

### Description

The Si474x receiver family applies 100% RF CMOS technology to bring digital low-IF radio technology to the automotive receiver market. The Si474x receiver family builds on Skyworks' highly successful broadcast audio radio products, offering design simplicity, unmatched integration, programmability, and automotive quality and reliability.

The Si474x receiver family supports world-wide FM bands from 64–108 MHz and AM bands from 520–1710 kHz. The Si474x supports AM/FM, weather band, shortwave, and longwave radio bands. All odd-numbered part numbers in the family support international RDS/RBDS protocols.

The Si474x family leverages Skyworks' patented digital architecture, delivering superior RF performance and interference rejection. The proven digital radio technology provides excellent sensitivity in weak signal environments, and superb selectivity and inter-modulation immunity in strong signal environments.

The solution offers programmable AM/FM channel spacing and filters, auto-calibrated digital tuning, and proven AM/FM seek functionality based on multiple signal quality and band parameters. The family offers highly flexible and advanced audio features such as noise blanking, programmable soft mute, and multi-path detection and mitigation.


The Si474x receiver system has a minimal bill of materials requiring a small amount of board space. The high level of integration provides a complete, tested broadcast audio receiver that is ideal for primary automotive radio receivers.

### Features

- Worldwide FM band support (64–108 MHz)
- Worldwide AM band support (520–1710 kHz)
- Shortwave, longwave support (Si4742/43/44/45 only)
- Weather band support (Si4742/43 only)
- Received signal quality indicators (RSSI, SNR, adjacent channel, wideband AM)
- Multipath detection/mitigation
- AM and FM noise blankers (Si4742/43/44/45 only)
- AM and FM programmable seek tuning
- AM and FM programmable soft mute control
- AM and FM adjustable channel bandwidth filters
- FM stereo-mono blending
- FM Hi-Cut control (Si4742/43/44/45 only)
- Digital FM stereo decoder
- RDS/RBDS processor (Si4741/43/45 only)
- Automatic frequency control (AFC)
- Automatic gain control (AGC)
- Image rejection mixer
- Frequency synthesizer with integrated VCO
- Low-IF direct conversion with no ceramic filters
- Analog or digital (I<sup>2</sup>S) outputs
- 3.0 to 3.6 V supply voltage
- Programmable reference clock
- AECQ-100 certified
  - 40 to 85 °C operation
- 24-pin 4 x 4 mm QFN package
  - Pb-free/RoHS compliant

### Applications

- OEM automotive radio systems
- After-market automotive radio systems
- Automotive radio modules

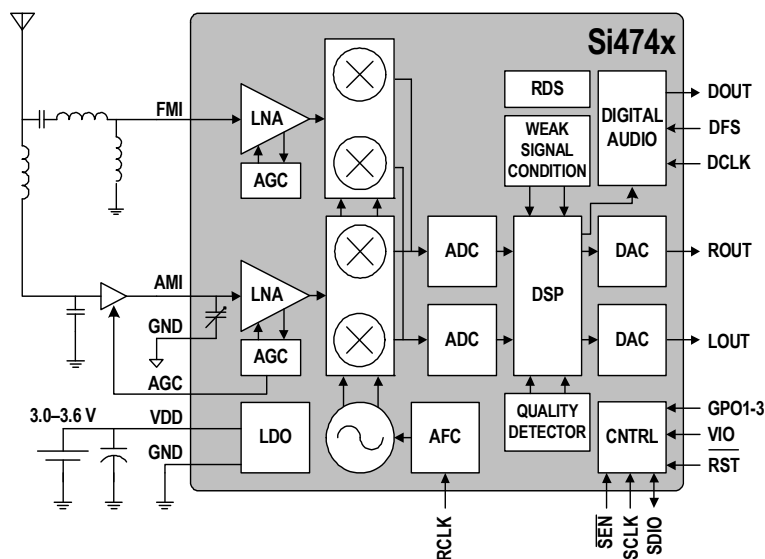


**Table 1. Selected Electrical Specifications<sup>1</sup>**


( $V_{DD} = 2.7$  to  $5.5$  V,  $V_{IO} = 1.5$  to  $3.6$  V,  $T_A = -40$  to  $85$  °C)

Parameter	Test Condition	Min	Typ	Max	Unit
<b>FM</b>					
Input Frequency		64	—	108	MHz
Sensitivity	(S+N)/N = 26 dB	—	2	—	μV EMF
RDS Sensitivity	$\Delta f = 2$ kHz, RDS BLER < 5%	—	8	—	μV EMF
Audio S/N (Mono) <sup>2,3</sup>	$f_{MOD} = 1$ kHz, $\Delta f = 22.5$ kHz, $V_{EMF} = 60$ dBμV <sub>EMF</sub>	—	63	—	dB
Audio THD (Mono) <sup>2,3</sup>	$f_{MOD} = 1$ kHz, $\Delta f = 75$ kHz, $V_{EMF} = 60$ dBμV <sub>EMF</sub>	—	0.1	—	%
Input IP3	$f_1 = 4000$ kHz; $f_2 = 8000$ kHz	—	105	—	dBμV EMF
Audio Output Voltage		—	80	—	mVrms
Adjacent Channel Selectivity	±200 kHz	—	50	—	dB
Alternate Channel Selectivity	±400 kHz	—	70	—	dB
AM Suppression <sup>4</sup>	$m = 0.3$ ; $\Delta f = 22.5$ kHz; $f_{RF} = 76$ to $108$ MHz; Measured at $V_{EMF} = 60$ dBμV <sub>EMF</sub>	—	55	—	dB
Audio Stereo Separation <sup>4</sup>	$f_{RF} = 76$ to $108$ MHz; Measured at $V_{EMF} = 60$ dBμV <sub>EMF</sub> ; $\Delta f = 75$ kHz	—	45	—	dB
Supply Voltage <sup>5</sup>		3	—	3.6	V
Supply Current <sup>5</sup>		—	26	—	mA
<b>AM</b>					
Input Frequency		520	—	1710	kHz
Sensitivity	(S+N)/N = 26 dB	—	28	—	μV EMF
Audio S/N <sup>4,6</sup>	30% modulation, $f_{MOD} = 1$ kHz, RF level = 74 dBμV EMF; $\Delta f = 22.5$ kHz	—	53	—	dB
Audio THD <sup>4,6</sup>	30% modulation, $f_{MOD} = 1$ kHz, RF level = 74 dBμV EMF; $\Delta f = 22.5$ kHz	—	0.3	—	%
Input IP3 <sup>7</sup>	$f_1 = 40$ kHz; $f_2 = 80$ kHz	—	112	—	dBμV
Audio Output Voltage <sup>4</sup>		54	60	66	mVrms
Adjacent Channel Selectivity	±10 kHz	—	40	—	dB
Alternate Channel Selectivity	±20 kHz	—	60	—	dB
<b>Notes:</b>					
1. Specifications refer to Si474x application circuit input.					
2. $B_{AF} = 300$ Hz to 15 kHz.					
3. $f_{RF} = 76$ to 108 MHz.					
4. $f_{MOD} = 1$ kHz, 75 μs de-emphasis, MONO = enabled, and L = R unless noted otherwise.					
5. Applies to both FM and AM modes.					
6. AGC is disabled.					
7. Specification refers to Si474x input.					

### Pin Assignments



### 4 x 4 x 0.85 mm 24-pin QFN Package Information

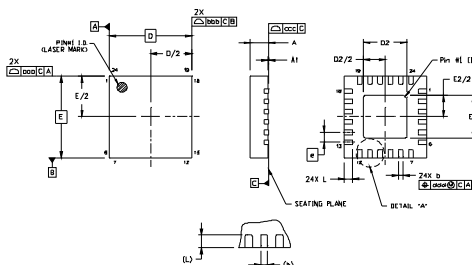

Symbol	Millimeters		
	Min	Nom	Max
A	0.80	0.85	0.90
A1	0.00	0.02	0.05
b	0.18	0.25	0.30
D	4.00 BSC		
D2	2.00	2.10	2.20
e	0.50 BSC		
E	4.00 BSC		
E2	2.00	2.10	2.20
L	0.30	0.40	0.50
aaa	—	—	0.10
bbb	—	—	0.10
ccc	—	—	0.08
ddd	—	—	0.10
eee	—	—	0.10




# SKYWORKS®

**Connecting Everyone  
and Everything,  
All the Time**



**Portfolio**

[www.skyworksinc.com](http://www.skyworksinc.com)



**Quality**

[www.skyworksinc.com/quality](http://www.skyworksinc.com/quality)



**Support & Resources**

[www.skyworksinc.com/support](http://www.skyworksinc.com/support)

**Copyright © 2021 Skyworks Solutions, Inc. All Rights Reserved.**

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters.

Skyworks, the Skyworks symbol, Sky5®, SkyOne®, SkyBlue™, Skyworks Green™, Clockbuilder®, DSPLL®, ISOModem®, ProSLIC®, and SiPHY® are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.

Skyworks Solutions, Inc. | Nasdaq: SWKS | [sales@skyworksinc.com](mailto:sales@skyworksinc.com) | [www.skyworksinc.com](http://www.skyworksinc.com)

USA: 781-376-3000 | Asia: 886-2-2735 0399 | Europe: 33 (0)1 43548540 | [in](https://www.linkedin.com/company/skyworks) [f](https://www.facebook.com/skyworks) [t](https://twitter.com/skyworks) [y](https://www.youtube.com/skyworks)