


## **GF-220U**

Aliases (UNFGF220UXXXXX)

KEMET, GF, EMI/RFI Filters, Noise Suppression, 250 VAC

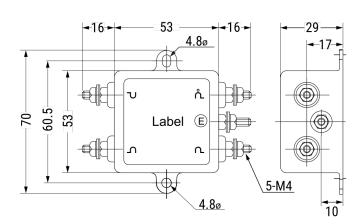

Click here for the 3D model.

Dimensions		
L	70mm NOM	
W	53mm	
Н	29mm	

Packaging Specifications		
Packaging	Tray, Box	
Packaging Quantity	10	
Component Weight	150 g	

General Information		
GF		
Metal Box		
Noise Filters		
With Exemptions		
d9c7b340-5c0a-4e16-b4ef-391381f88890		
UL		
30 K Self-Temperature Rise Max.		
Screw		

Specifications	
Voltage AC	250 VAC
Voltage	1500 VAC Withstanding Voltage 1 Min. Line to Ground
Rated Current	20 A (AC/DC)
Rated Temperature	55°C
Temperature Range	-20/+60°C
Leakage Current	1mA MAX (250 V 60 Hz)
Resistance	300 MOhms MIN Insulation 500 VDC 1 Min. Line

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.