

# CGA6N3X7S1H475M230AE

TDK Item Description : CGA6N3X7S1H475MT\*\*\*S



Equivalent C3225X7S1H475M for Automotive

## Application & Main Feature

Automotive Grade ( Soft Termination )

## Series

CGA6(3225) [EIA CC1210]



## Dimensions

L	3.20mm +0.5,-0.4mm
W	2.50mm +/-0.3mm
T	2.30mm +0.3,-0.2mm
B	0.20mm Min.
G	

## Temperature Characteristic

X7S (-55 to 125 degC +/-22%)

## Rated Voltage

1H (50Vdc)

## Capacitance

4.7uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

5% Max.


## Insulation Resistance

106Mohm Min.


## AEC-Q200

Yes


**|Z|, ESR vs. Freq. Characteristics (Simulation Data)**

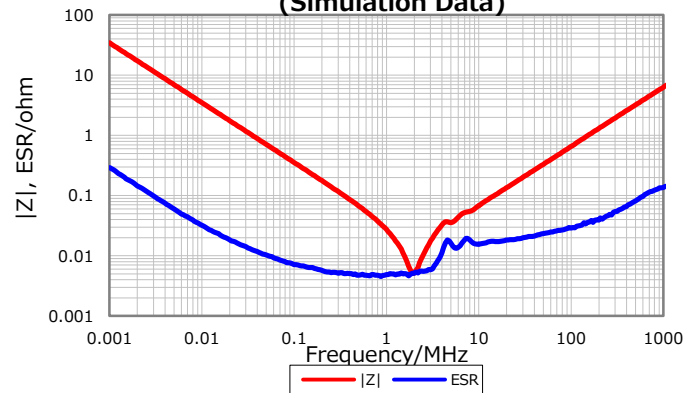


**Cap. vs. Freq. Characteristic**

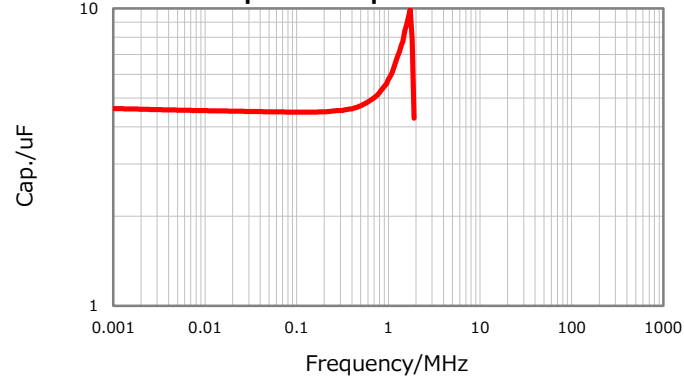


**DC Bias Characteristic**

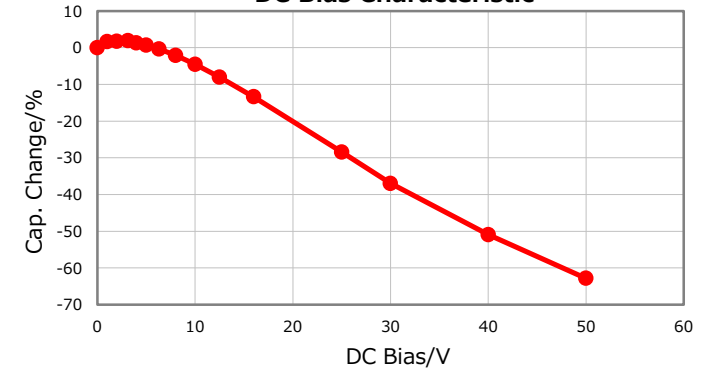

**Temperature Characteristics**

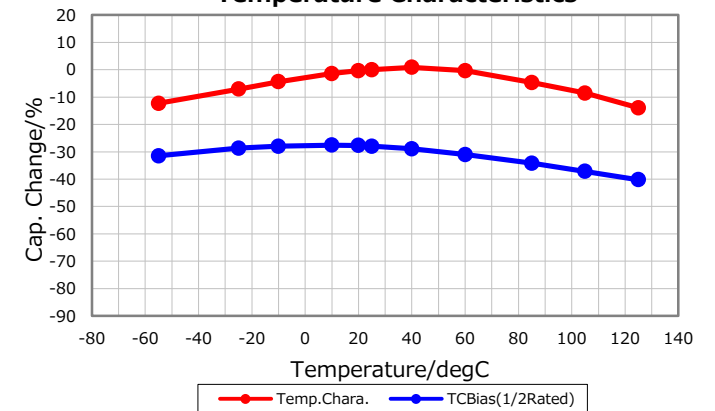

**Ripple Temperature Rise Characteristics**

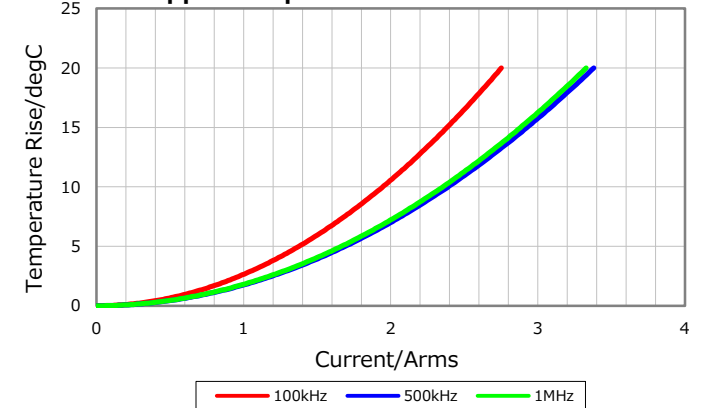

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

March 17, 2017