

# 15 A, 600 V, Ultrafast Diode RUR1S1560S9A

## Description

The RUR1S1560S is an ultrafast diode with low forward voltage drop. This device is intended for use as freewheeling and clamping diodes in a variety of switching power supplies and other power switching applications. It is specially suited for use in switching power supplies and industrial application.

## **Features**

- Ultrafast Recovery  $t_{rr} = 60 \text{ ns } (@ I_F = 15 \text{ A})$
- Max Forward Voltage,  $V_F = 1.5 \text{ V}$  (@  $T_C = 25^{\circ}\text{C}$ )
- 600 V Reverse Voltage and High Reliability
- Avalanche Energy Rated
- These Devices are Pb-Free and are RoHS Compliant

### **Applications**

- Switching Power Supplies
- Power Switching Circuits
- General Purpose

## **ABSOLUTE MAXIMUM RATINGS**


(T<sub>C</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	600	V
Working Peak Reverse Voltage	$V_{RWM}$	600	V
DC Blocking Voltage	$V_R$	600	V
Average Rectified Forward Current	I <sub>F(AV)</sub>	15	Α
Repetitive Peak Surge Current (20 kHz Square Wave)	I <sub>FRM</sub>	30	Α
Nonrepetitive Peak Surge Current (Halfwave 1 Phase 60 Hz)	I <sub>FSM</sub>	200	Α
Power Dissipation	P <sub>D</sub>	100	W
Avalanche Energy (1 A, 40 mH)	E <sub>AVL</sub>	20	mJ
Operating and Storage Temperature	T <sub>J</sub> , T <sub>STG</sub>	-55 to 175	°C
Maximum Temperature for Soldering Leads at 0.063 in (1.6 mm) from Case for 10 s, Package Body for 10 s, see Techbrief TB334	T <sub>L</sub> T <sub>pkg</sub>	300 260	°C °C

## THERMAL SPECIFICATIONS

Thermal Resistance Junction to Case	$R_{ heta JC}$	1.5	°C/W
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	60	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




D<sup>2</sup>PAK2 (TO-263-2L) CASE 418BK

#### SYMBOL



#### **MARKING DIAGRAM**



\$Y = Logo

&Z = Assembly Plant Code

&3 = Date Code

&K = Lot Run Traceability Code RUR1560 = Specific Device Code

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 2 of this data sheet.

# RUR1S1560S9A

## **ELECTRICAL CHARACTERISTICS**

 $(T_C = 25^{\circ}C \text{ unless otherwise noted})$ 

Symbol	Parameter	Test Condition	Min	Тур	Max	Unit
V <sub>F</sub>	Instantaneous Forward Voltage (Pulse width = 300 μs, Duty cycle = 2%)	I <sub>F</sub> = 15 A	-	-	1.5	V
		I <sub>F</sub> = 15 A, T <sub>C</sub> = 150°C	_	-	1.2	
I <sub>R</sub>	Instantaneous Reverse Current	V <sub>R</sub> = 600 V	-	-	100	μΑ
		$V_R = 600 \text{ V}, T_C = 150^{\circ}\text{C}$	_	-	500	
t <sub>rr</sub>	Reverse Recovery Time (see Package Dimensions section), summation of $t_a + t_b$	$I_F = 1 \text{ A, } dI_F/dt = 100 \text{ A/}\mu\text{s,} \ V_R = 30 \text{ V}$	-	-	55	ns
		$I_F = 15 \text{ A}, dI_F/dt = 100 \text{ A/}\mu\text{s}, V_R = 30 \text{ V}$	-	-	60	
t <sub>a</sub>	Time to Reach Peak Reverse Current (see Package Dimensions section)	$I_F = 1 \text{ A, } dI_F/dt = 100 \text{ A/}\mu\text{s,} \ V_R = 30 \text{ V}$	-	20	-	ns
		$I_F = 15 \text{ A}, dI_F/dt = 100 \text{ A/}\mu\text{s}, V_R = 30 \text{ V}$	-	30	-	
t <sub>b</sub>	Time from Peak I <sub>RM</sub> to projected Zero Crossing of I <sub>RM</sub> based on a Straight Line from Peak I <sub>RM</sub> through 25% of I <sub>RM</sub> (see Package Dimensions section).	$I_F = 1 \text{ A, } dI_F/dt = 100 \text{ A/}\mu\text{s,} \ V_R = 30 \text{ V}$	-	15	-	ns
		$I_F = 15 \text{ A}, dI_F/dt = 100 \text{ A/}\mu\text{s}, V_R = 30 \text{ V}$	-	17	_	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## **ORDERING INFORMATION**

Part Number	Top Mark	Package	Shipping <sup>†</sup>
RUR1S1560S9A	RUR1560	D <sup>2</sup> PAK2 (TO-263-2L) (Pb-Free)	800 Units/ Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## **RUR1S1560S9A**

# TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Forward Voltage vs. Forward Current




Figure 3. Typical  $t_{rr}$ .  $t_a$  and  $t_b$  Curves vs. Forward Current




Figure 2. Reverse Voltage vs. Reverse Current




Figure 4. Typical Current Derating Curve vs.

Case Temperature

# RUR1S1560S9A

# **TEST CIRCUITS AND WAVEFORMS**




Figure 5. t<sub>rr</sub> Test Circuit




Figure 6. t<sub>rr</sub> Waveforms and Definitions




Figure 7. Avalanche Energy Test Circuit





Figure 8. Avalanche Current and Voltage Waveforms

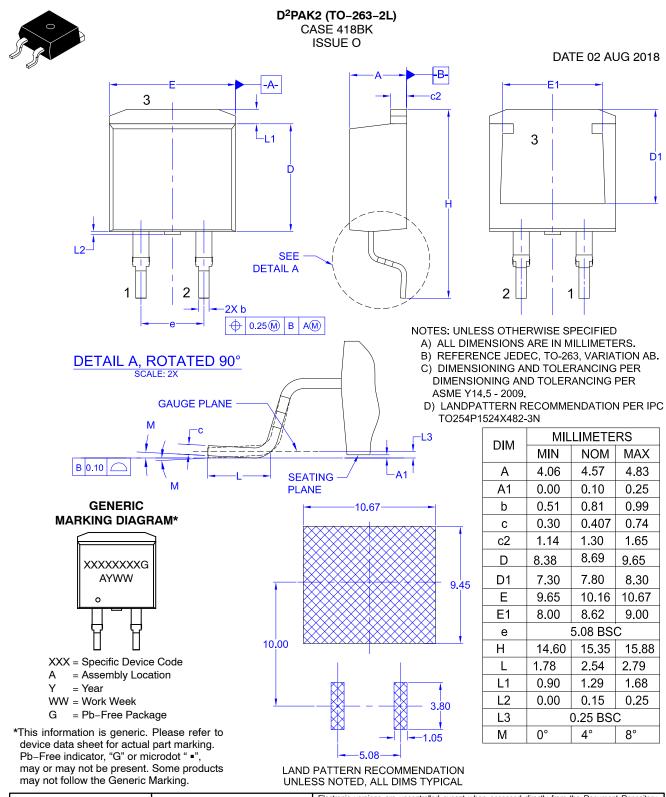

DOCUMENT NUMBER:	98AON93788G	Printed versions are uncontrolled except when accessed directly from the Document Repository.  Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	D <sup>2</sup> PAK2 (TO-263-2L)		PAGE 1 OF 1	

onsemi and ONSemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales