Reference Only

P1/8

CHIP COIL (CHIP INDUCTORS) LQH43PH Murata Standard Reference Specification [AEC-Q200]

1. Scope

This reference specification applies to LQH43PH_26L Series, Chip coil (Chip Inductors) for automotive Electronics based on AEC-Q200.

2. Part Numbering

(ex)	LQ	Н	43	P	Н	1R0	Ν	26	L
	Product ID	Structure	Dimension	Applications	Category	Inductance	Tolerance	Dimension	Packaging
			(L×W)	and				(T)	L:Taping
				Characteristics					

3. Rating

Operating Temperature Range.

(Ambient temperature; Self-temperature rise is not included) -40 to +105°C (Product temperature; Self- temperature rise is included) -40 to +125°C -40 to +125°C

Storage Temperature Range.

Inductance *3 Rated Current(mA) Self *2 (Based on DC *1 Customer MURATA Resonant ESD Temperature rise) Resistance Tolerance Part Number Part Number Frequency (Based on 5A:8kV (µH) (Ω) Ambient Ambient (%) Inductance (MHz min) temperature temperature change) 85°C 105°C LQH43PH1R0N26L 1.0 N:±30 0.026±20% 100 3400 3300 1410 LQH43PH2R2M26L 2.2 0.042±20% 45 2300 2500 1120 LQH43PH3R3M26L 0.052±20% 1000 3.3 40 1800 2100 LQH43PH4R7M26L 4.7 0.075±20% 35 1400 1600 780 LQH43PH6R8M26L 6.8 0.098±20% 30 1200 1400 760 LQH43PH8R2M26L 8.2 0.128±20% 25 1100 1300 670 5A 0.147±20% 1050 1170 LQH43PH100M26L 10 M:±20 20 620 LQH43PH220M26L 22 0.327±20% 15 700 780 400 0.718±20% 470 LQH43PH470M26L 47 8 520 280 1.538±20% 4 320 320 180 LQH43PH101M26L 100 280 140 LQH43PH151M26L 150 2.362±20% 3 260 LQH43PH221M26L 2.900±20% 220 240 130 220 2

*1: When applied Rated current to the Products, Inductance will be within ±30% of nominal Inductance value.

*2: When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 40°C max.

*3: Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

4. Testing Conditions


<Unless otherwise specified>


Temperature : Ordinary Temperature (15 to 35°C) Humidity : Ordinary Humidity (25 to 85 %(RH) <In case of doubt> Temperature : 20C± 2°C Humidity : 60 to 70%(RH) Atmospheric Pressure : 86 to 106 kPa

Spec No.JELF243A-9137E-01



5. Appearance and Dimensions





6. Electrical Performance

No.	Item	Specification	Test Method
6.1	Inductance	Inductance shall meet item 3.	Measuring Equipment: KEYSIGHT 4284A or equivalent Measuring Frequency: 1MHz
6.2	DC Resistance	DC Resistance shall meet item 3.	Measuring Equipment: Digital multi meter
6.3	Self Resonant Frequency(S.R.F)	S.R.F shall meet item 3.	Measuring Equipment: KEYSIGHT E4991A or equivalent

7. AEC-Q200 Requirement

7.1 Performance (based on Table 5 for Magnetics(Inductors / Transformer) AEC-Q200 Rev.D issued June. 1 2010

AEC-Q200			Murata Specification / Deviation		
No	Stress	Test Method	Murata Specification /	Deviation	
3	High Temperature	1000hours at 125 deg C Set for 24hours at room	Meet Table A after testing. Table A		
	Exposure	temperature, then measured.	Appearance	No damage	
			Inductance Change (at 1MHz)	Within ±10%	
			DC Resistance Change	Within ±10%	
4	Temperature Cycling	1000cycles -40 deg C to + 125deg C Set for 24hours at room temperature,then measured.	Meet Table A after testing.		
7	Biased Humidity	1000hours at 85 deg C, 85%RH unpowered	Meet Table A after testing.		
8	Operational Life	Apply Rated Current 85 deg C 1000 hours Set for 24hours at room temperature, then measured	Meet Table A after testing.		
9	External Visual	Visual inspection	No abnormalities		
10	Physical Dimension	Meet ITEM 5 (Style and Dimensions)	No defects		
12	Resistance to Solvents	Per MIL-STD-202 Method 215	Not Applicable		

P2/8


Reference Only

P3/8

		AEC-Q200	Murata Specification / Deviation	
No	Stress	Test Method	Murata Specification / Deviation	
13	Mechanical Shock	Per MIL-STD-202 Method 213 100g's/6ms/Half sine	Meet Table A after testing.	
14	Vibration	5g's for 20 minutes, 12cycles eah of 3 orientations Test from 10-2000Hz. 12cycles each of 3 orientations	Meet Table A after testing.	
15	Resistance to Soldering Heat	No-heating Solder temperature 260C+/-5 deg C Immersion time 10s	Pre-heating: 150 to 180C /90±30s Meet Table A after testing.	
17	ESD	Per AEC-Q200-002 ESD Rank: Refer to Item 3. Rating	Appearance: No damage	
18	Solderbility	Per J-STD-002	Method B : Not Applicable 95% of the terminations is to be soldered. (Except exposed wire)	
19	Electrical Characterization	Measured : Inductance	No defects	
20	Flammability	Per UL-94	Not Applicable	
21	Board Flex	Epoxy-PCB(1.6mm) Deflection 2mm(min) 60s minimum holding time	Holding time: 5s Meet Table A after testing.	
22	Terminal Strength	Per AEC-Q200-006 A force of 17.7N for 60s	No defects	

8. Specification of Packaging

8.1 Appearance and Dimensions of plastic tape(12 mm width/plastic tape)

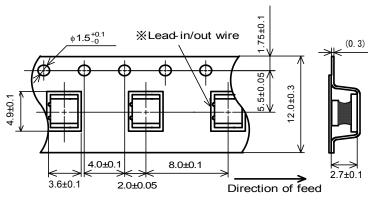


The packing directions of the chip coil in taping are unified with the in/out positions of the lead wire.

(in mm)

Dimension of the Cavity is measured at the bottom side.

8.2 Specification of Taping

- (1) Packing quantity (standard quantity)
 - 500 pcs / reel
- (2) Packing Method
 - Products shall be packed in the each embossed cavity of plastic tape and sealed by cover tape.
- (3) Sprocket hole
 - The sprocket holes are to the right as the tape is pulled toward the user.
- (4) Spliced point
 - Plastic tape and Cover tape has no spliced point.
- (5) Missing components number
 - Missing components number within 0.1 % of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.






8.3 Pull Strength

Embossed carrier tape	10N min.
Cover tape	5N min.


8.4 Peeling off force of cover tape

Speed of Peeling off	300mm/min	
Peeling off force	0.2 to 0.7N (minimum value is typical)	



8.5 Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (cover tape) and trailer-tape (empty tape) as follows.

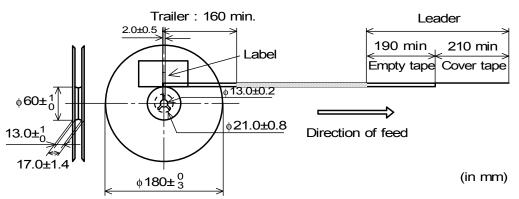

8.6 Marking for reel

Customer part number, MURATA part number, Inspection number(*1), RoHS marking(*2), Quantity etc ···

*2) « Expression of RoHS marking » ROHS – \underline{Y} ($\underline{\Delta}$) (1) (2)


(1) RoHS regulation conformity

(2) MURATA classification number

8.7 Marking for Outside package (corrugated paper box)

Customer name, Purchasing order number, Customer part number, MURATA part number, RoHS marking (*2) ,Quantity, etc ···

8.8. Specification of Outer Case



Outer Ca	ase Dimensio	Standard Reel Quantity		
W	D	Н	in Outer Case (Reel)	
186	186	93	4	
Above Outer Cree size is twicely it dependence a supertity of an				

*Above Outer Case size is typical. It depends on a quantity of an order

P4/8



9.1 Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

(8) Disaster prevention / crime prevention equipment

Reference Onl

- (1) Aircraft equipment
- (6) Transportation equipment (trains, ships, etc.)(7) Traffic signal equipment
- (2) Aerospace equipment(3) Undersea equipment
- (3) Undersea equipment
- (4) Power plant control equipment(5) Medical equipment
- (9) Data-processing equipment(10) Applications of similar complexity and /or reliability requirements to the applications listed in the above
- 9.2 Caution(Rating)

Do not exceed maximum rated current of the product. Thermal stress may be transmitted to the product and short/open circuit of the product or falling off the product may be occurred.

9.3 Fail-safe

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

10. Notice


This product is designed for solder mounting. Please consult us in advance for applying other mounting method such as conductive adhesive.

10.1 Land pattern designing

Recommended land patterns for reflow soldering are as follows:

These have been designed for Electric characteristics and solderability.

Please follow the recommended patterns. Otherwise, their performance which includes electrical performance or solderability may be affected, or result to "position shift" in soldering process.



10.2 Flux, Solder

Flux	 Use rosin-based flux. Don't use highly acidic flux with halide content exceeding 0.2(wt)% (chlorine conversion value). Don't use water-soluble flux.
Solder	 Use Sn-3.0Ag-0.5Cu solder Standard thickness of solder paste : 100µm to 150µm

Other flux (except above) Please contact us for details, then use.


P5/8



10.3 Reflow soldering conditions

- Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 100°C max. Cooling into solvent after soldering also should be in such a way that the temperature difference is limited to 100°C max.
- Insufficient pre-heating may cause cracks on the product, resulting in the deterioration of product quality.
- Standard soldering profile and the limit soldering profile is as follows.
- The excessive limit soldering conditions may cause leaching of the electrode and / or resultingin the deterioration of product quality.

Soldering profile

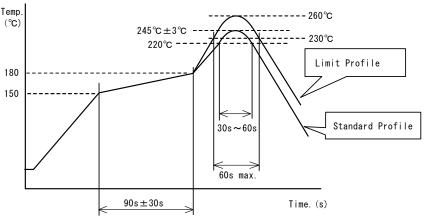

	Standard Profile	Limit Profile	
Pre-heating	150∼180°C 、90s±30s		
Heating	above 220°C、30s~60s	above 230°C、60s max.	
Peak temperature	245±3°C	260°C,10s	
Cycle of reflow	2 times	2 times	

10.4 Reworking with soldering iron.

The following conditions must be strictly followed when using a soldering iron.

Pre-heating	150°C,1 min
Tip temperature	350°C max.
Soldering iron output	80W max.
Tip diameter	ϕ 3mm max.
Soldering time	3(+1,-0)s
Times	2 times

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

10.5 Solder Volume

- · Solder shall be used not to be exceeded the upper limits as shown below.
- Accordingly increasing the solder volume, the mechanical stress to Chip is also increased.
 Exceeding solder volume may cause the failure of mechanical or electrical performance.








10.6 Product's location

- The following shall be considered when designing and laying out P.C.B.'s.
 - (1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.



Products shall be located in the sideways direction (Length:a<b) to the mechanical stress.


 $\langle \mathsf{Poor} \ \mathsf{example} \rangle$

(Good example)

(2) Components location on P.C.B. separation.

It is effective to implement the following measures, to reduce stress in separating the board. It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.

Contents of Measures	Stress Level
 Turn the mounting direction of the component parallel to the board separation surface. 	A > D*1
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C



- *1 A > D is valid when stress is added vertically to the perforation as with Hand Separation. If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.
- (3) Mounting Components Near Screw Holes When a component is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw. Mount the component in a position as far away from the screw holes as possible.

10.7 Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max.(40°C max for IPA.)
- (2) Ultrasonic cleaning shall comply with the following conditions with avoiding the resonance phenomenon at the mounted products and P.C.B.
 - Power: 20 W / I max. Frequency: 28kHz to 40kHz Time: 5 minutes max.
- (3) Cleaner Alcohol-based cleaner: IPA
 - Aqueous agent: PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning.
- In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.
- (5) Other cleaning


Please contact us.

10.8 Resin coating

The inductance value may change due to high cure-stress of resin to be used for coating/molding products. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit. So, please pay your careful attention when you select resin in case of coating/molding the products with the resin. Prior to use the coating resin, please make sure no reliability issue is observed by evaluating products mounted on your board.

10.9 Caution for use

- Sharp material such as a pair of tweezers or other material such as bristles of cleaning brush, shall not be touched to the winding portion to prevent the breaking of wire.
- · Mechanical shock should not be applied to the products mounted on the board to prevent the breaking of the core.



P7/8




10.10 Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.

Bending



10.11 Storage and Handling Requirements

- (1) Storage period
 - Use the products within 12 months after delivered.
 - Solderability should be checked if this period is exceeded.
- (2) Storage conditions
 - · Products should be stored in the warehouse on the following conditions.
 - Temperature : -10 ~ 40°C
 - Humidity : 15 to 85% relative humidity No rapid change on temperature and humidity
 - The electrode of the products is coated with solder. Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
 - Products should not be stored on bulk packaging condition to prevent the chipping of the core and the breaking
 of winding wire caused by the collision between the products.
 - · Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
 - Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- (3) Handling Condition
 - Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

11. 🗥 Note

- (1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3) The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.

P8/8