TinyLogic UHS Dual 2-Input NAND Gate with Schmitt Trigger Inputs

NC7WZ132

Description

The NC7WZ132 is a dual 2–Input NAND Gate with Schmitt–trigger inputs from ON Semiconductor's Ultra High Speed Series of TinyLogic. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a broad V_{CC} operating range. The device is specified to operate over the 1.65 V to 5.5 V V_{CC} operating range. The inputs and output are high impedance when V_{CC} is 0 V. Inputs tolerate voltages up to 5.5 V independent of V_{CC} operating voltage. Schmitt trigger inputs achieve typically 1 V hysteresis between the positive–going and negative–going input threshold voltage at 5 V V_{CC} .

Features

- Space Saving US8 Surface Mount Package
- MicroPakTM Leadless Package
- Ultra High Speed: $t_{PD} = 3.1$ ns Typ. into 50 pF at 5 V V_{CC}
- High Output Drive: ±24 mA at 3 V V_{CC}
- Broad V_{CC} Operating Range: 1.65 V to 5.5 V
- Matches the Performance of LCX when Operated at 3.3 V V_{CC}
- Power Down High Impedance Inputs / Output
- Overvoltage Tolerant Inputs Facilitate 5 V to 3 V Translation
- Proprietary Noise / EMI Reduction Circuitry Implemented
- Schmitt Trigger Inputs are Tolerant of Slow Changing Input Signals
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant



ON Semiconductor®

www.onsemi.com

MARKING DIAGRAMS



UQFN8 1.6X1.6, 0.5P CASE 523AY





US8 CASE 846AN



T5, WZD2 = Specific Device Code

KK = 2-Digit Lot Run Traceability Code XY = 2-Digit Date Code Format Z = Assembly Plant Code

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.




Figure 1. Logic Symbol

Connection Diagram





Figure 2. Connection Diagram (Top View)



AAA represents Product Code Top Mark - see ordering code

NOTE: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Figure 3. Pin One Orientation Diagram

PIN DESCRIPTION

Pin Names	Description
A _n , B _n	Inputs
Y _n	Output




Figure 4. Pad Assignments for MicroPak (Top Thru View)

FUNCTION TABLE $(Y = \overline{AB})$

Inp	Output			
Α	A B			
L	L	Н		
L	Н	Н		
Н	L	Н		
Н	Н	L		

H = HIGH Logic Level L = LOW Logic Level

NC7WZ132

ABSOLUTE MAXIMUM RATINGS

Symbol	Param	Min	Max	Unit	
V _{CC}	Supply Voltage	Supply Voltage			V
V _{IN}	DC Input Voltage		-0.5	6.5	V
V _{OUT}	DC Output Voltage		-0.5	6.5	V
I _{IK}	DC Input Diode Current	V _{IN} < 0 V	-	-50	mA
I _{OK}	DC Output Diode Current	V _{OUT} < 0 V	-	-50	mA
I _{OUT}	DC Output Current	•	-	±50	mA
I _{CC} / I _{GND}	DC V _{CC} / GND Current		-	±50	mA
T _{STG}	Storage Temperature		-65	+150	°C
TJ	Junction Temperature under Bias		-	150	°C
T _L	Junction Lead Temperature (Sold	ering, 10 Seconds)	-	260	°C
P_{D}	Power Dissipation in Still Air US8		-	500	mW
		MicroPak-8	-	539	mW

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS

Symbol	Paramet	Min	Max	Unit	
V _{CC}	Supply Voltage Operating	1.65	5.5	V	
	Supply Voltage Data Retention	1.5	5.5		
V _{IN}	Input Voltage	0	5.5	V	
V _{OUT}	Output Voltage	0	V _{CC}	V	
T _A	Operating Temperature	-40	+85	°C	
$\theta_{\sf JA}$	Thermal Resistance	US8	-	250	°C/W
		MicroPak-8	-	232	°C/W

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

1. Unused inputs must be held HIGH or LOW. They may not float.

NC7WZ132

DC ELECTICAL CHARACTERISTICS


						A = +25°	С	$T_A = -40$	to +85°C				
Symbol	Parameter	V _{CC} (V)	Co	onditions	Min	Тур	Max	Min	Max	Unit			
V _P	Positive Threshold 1.65				_	0.99	1.4	_	1.4	٧			
	Voltage	2.3			_	1.39	1.8	-	1.8	1			
		3.0			_	1.77	2.2	-	2.2	1			
		4.5			_	2.49	3.1	_	3.1	1			
		5.5			_	2.96	3.6	_	3.6	1			
V _N	Negative Threshold	1.65			0.2	0.53	_	0.2	-	V			
	Voltage	2.3	1		0.4	0.78	-	0.4	-	1			
		3.0	1		0.6	1.02	-	0.6	-	1			
		4.5	1		1.0	1.48	-	1.0	-	1			
		5.5	1		1.2	1.76	-	1.2	-	1			
V _H	Hysteresis Voltage	1.65			0.15	0.46	0.9	0.15	0.9	V			
		2.3			0.25	0.61	1.1	0.25	1.1	1			
		3.0	1		0.4	0.75	1.2	0.4	1.2	1			
		4.5	1		0.6	1.01	1.5	0.6	1.5	1			
			1		0.7	1.20	1.7	0.7	1.7	1			
V _{OH}	HIGH Level Output	el Output 1.65 V _{IN} = V _I	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	1.55	1.65	-	1.55	-	V			
Voltage	2.3	or V _{IL}		2.2	2.3	_	2.2	-	1				
		3.0			2.9	3.0	_	2.9	-	1			
		4.5			4.4	4.5	_	4.4	-	1			
		1.65	1	I _{OH} = -4 mA	1.29	1.52	_	1.29	-	1			
		2.3		I _{OH} = -8 mA	1.9	2.15	_	1.9	-	7			
		3.0		I _{OH} = -16 mA	2.4	2.80	_	2.4	-				
		3.0					7	I _{OH} = -24 mA	2.3	2.68	-	2.3	-
		4.5		I _{OH} = -32 mA	3.8	4.20	-	3.8	-	1			
V_{OL}	LOW Level Output	1.65	$V_{IN} = V_{IH}$ or V_{IL}	I _{OL} = 100 μA	_	0.0	0.10	-	0.10	V			
	Voltage	2.3	or v _{IL}		_	0.0	0.10	-	0.10				
		3.0			_	0.0	0.10	-	0.10				
		4.5			_	0.0	0.10	_	0.10				
		1.65		I _{OL} = 4 mA	_	0.08	0.24	-	0.24				
		2.3		I _{OL} = 8 mA	_	0.10	0.3	-	0.3				
		3.0		I _{OL} = 16 mA	_	0.15	0.4	_	0.4				
	 	3.0	-	I _{OL} = 24 mA	_	0.22	0.55	-	0.55				
		4.5		I _{OL} = 32 mA	_	0.22	0.55	-	0.55	1			
I _{IN}	Input Leakage Current	1.65 to 5.5	V _{IN} = 5.5	V, GND	_	_	±0.1	-	±1	μΑ			
l _{OFF}	Power Off Leakage Current	0.0	V _{IN} or V _{OL}	_{IT} = 5.5 V	-	-	1	-	10	μΑ			
I _{CC}	Quiescent Supply Current	1.65 to 5.5	V _{IN} = 5.5 \	, GND	-	-	1	-	10	μΑ			

AC ELECTRICAL CHARACTERISTICS

				T _A = +25°C			$T_A = +25^{\circ}C$ $T_A = -40 \text{ to } +85^{\circ}C$		
Symbol	Parameter	V _{CC} (V)	Conditions	Min	Тур	Max	Min	Max	Unit
t _{PLH} , t _{PHL}	Propagation Delay	1.8 ±0.15	C_L = 15 pF, R_L = 1 M Ω	-	7,1	13.0	-	13.5	ns
	(Figure 5, 7)	2.5 ±0.2		-	4.5	7.5	-	8.0	1
		3.3 ±0.3		-	3.4	5.0	-	5.5	1
		5.0 ±0.5		-	2.6	3.8	-	4.2	
		3.3 ±0.3	C _L = 50 pF,	-	4.0	5.8	-	6.3	ns
		5.0 ±0.5	$R_L = 500 \Omega$	-	3.1	4.5	-	4.9	
C _{IN}	Input Capacitance	0		-	2.5	-	-	-	pF
	Power Dissipation Capacitance	3.3	(Note 2)	-	15	=	-	_	pF
	(Figure 6)	5.0		_	18	-	-	-	1


^{2.} C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (see Figure 6) C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC}static).

AC Loading and Waveforms



 C_L includes load and stray capacitance Input PRR = 1.0 MHz, $t_W = 500 \ \text{ns}$

Figure 5. AC Test Circuit



 $\begin{aligned} & \text{Input} = \text{AC Waveform; } t_r = t_f = 1.8 \text{ ns;} \\ & \text{PRR} = 10 \text{ MHz; } \text{Duty Cycle} = 50\%. \end{aligned}$

Figure 6. I_{CCD} Test Circuit




Figure 7. AC Waveforms

NC7WZ132

ORDERING INFORMATION

Order Number	Top Mark	Package	Shipping [†]
NC7WZ132K8X	WZD2	8-Lead US8, JEDEC MO-187, Variation CA 3.1 mm Wide	3000 / Tape & Reel
NC7WZ132L8X	T5	8-Lead MicroPak, 1.6 mm Wide	5000 / Tape & Reel


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


3. All packages are lead free per JEDEC: J-STD-020B standard.


MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.


UQFN8 1.6X1.6, 0.5P CASE 523AY ISSUE O

DATE 31 AUG 2016

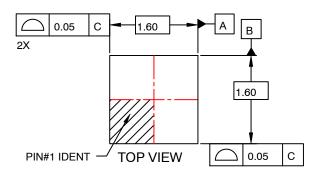

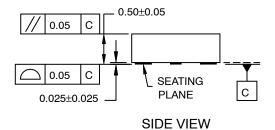

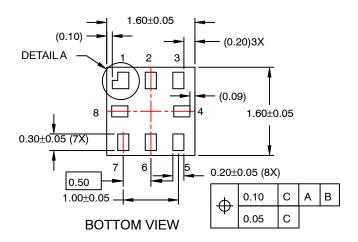




RECOMMENDED LAND PATTERN

NOTES:

- A. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.





DOCUMENT NUMBER:	98AON13591G	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED (
DESCRIPTION:	UQFN8 1.6X1.6, 0.5P		PAGE 1 OF 1

ON Semiconductor and a re trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


US8 CASE 846AN ISSUE O

DATE 31 DEC 2016

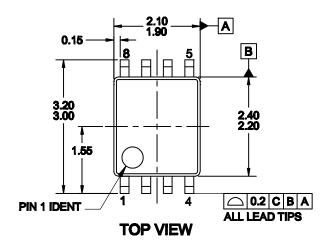




RECOMMENDED LAND PATTERN

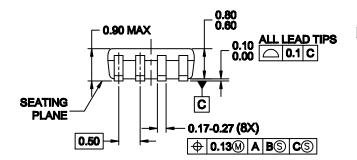


NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-187
- **B. DIMENSIONS ARE IN MILLIMETERS.**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1994.

SIDE VIEW

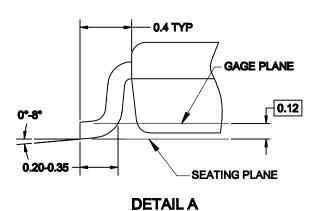

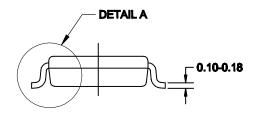

DOCUMENT NUMBER:	98AON13778G	Electronic versions are uncontrolled except when accessed directly from the Document Repr Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	US8		PAGE 1 OF 1		

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: a Phone: 00421 33 790 2910

Phone: 011 421 33 790 2910 For additional information, please contact your local Sales Representative